


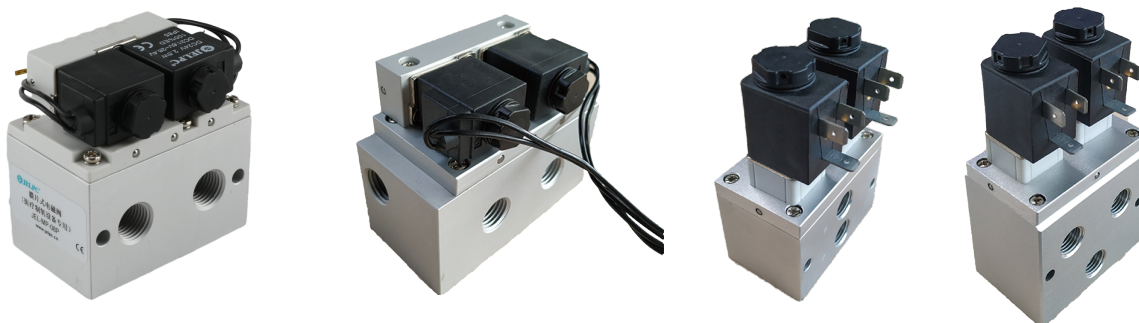


Features

1. Adopt new processing, improved inner hole roughness.
2. Adopt specially formulated silicone to increase of service life.
3. To import German high standard special grease which pro film in order to reduce the friction.
4. Valve spool material use soft magnetic stainless steel from German, increase the magnetic properties and reduce the coil power to 30%.

Ordering Code

JEL	MP	08	□	W
JELPC	Diaphragm	Port Size 08:G1/4"	Coil Size Blank:22mm coil P:18mm coil	Wing W:Lead wire Blank: Pins

Symbol



Specification

Model	JEL-MP-08		
	Blank	P	
Valve Type	4/2 Way		
Power	3W	1.5W	2.5W
Working Medium	40 Micron Filtered Air		
Operation	Internal Piloted		
Working Pressure	0.08 ~ 0.35MPa		
Ambient Temperature	-5 ~ 80°C		
Protection Class	F Class, IP 65		

Valve

J4V

J4V100

J4V200

J4V300

J4V400

Manifold

JSY

Terminal

JVT

JEL

MVSD

VF

NAMUR

551

JEL10

3VJZF

Diaphragm

JELVD

3V1

Coil

2P

2V

2W

2W(big)

2L

VX

PU

PU225

2Q

JEL5404

JEL6213

Pulse

JELJZF

4H

TSV

MPV

4HV

HV, K

4R

4F210

FV

MSV

JM

ASC, RE

QE, QEA

ST

HSV

JEL Series

Diaphragm Solenoid Valve



Valve


J4V
J4V100
J4V200
J4V300
J4V400
Manifold
JSY
Terminal
JVT
JEL
MVSD
VF
NAMUR
551
JEL10
3VJZF

Diaphragm

JELVD
3V1
Coil
2P
2V
2W
2W(big)
2L
VX
PU
PU225
2Q
JEL5404
JEL6213
Pulse
JELJZF
4H
TSV
MPV
4HV
HV, K
4R
4F210
FV
MSV
JM
ASC, RE
QE, QEA
ST
HSV

Overall Dimension

JEL-MP-08

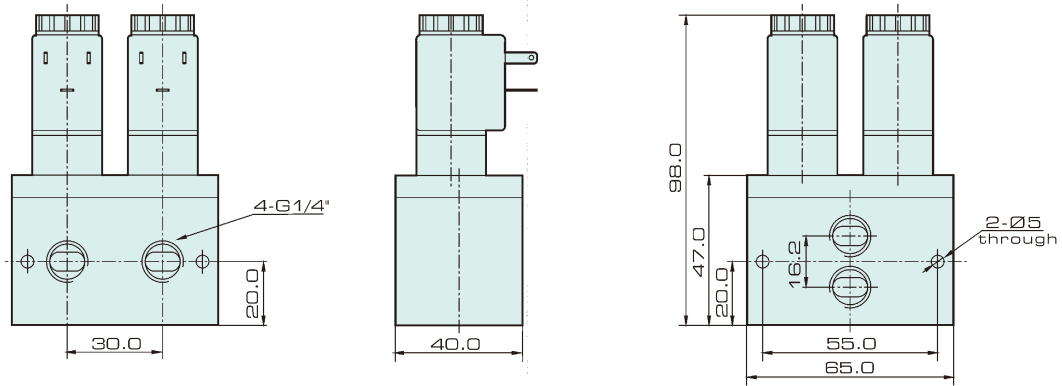

JEL-MP-08-P

