

PU Series

Solenoid Valve (For Steam)



PU225-04S-J




PU225-04S-J

Ordering Code

PU	225	03	S	AC220V	J
Specification	Operation	Port Size	Fix Form	Standard Voltage	Wiring
PU: 2/2 way	225: Internal	03: 3/8"	S: Steam	AC220V	J: Terminal
		04: 1/2"		AC110V	W: Lead wire
		06: 3/4"		DC12V	
		08: 1"		DC24V	


Symbol



Specification

Model	PU225-03S	PU225-04S	PU225-06S	PU225-08S
Working Medium	Air, Water, Oil, Gas			
Operation	Internal Piloted			
Type	Normal Close			
Orifice	13mm	13mm	25mm	25mm
CV Value	4.50	4.50	12.00	12.00
Port Size	3/8"	1/2"	3/4"	1"
Operation Fluid Viscosity	50 CST			
Working Pressure	0.05 ~ 1.0MPa			
Max. Test Pressure	1.5MPa			
Ambient Temperature	-10 ~ 185°C			

Overall Dimension

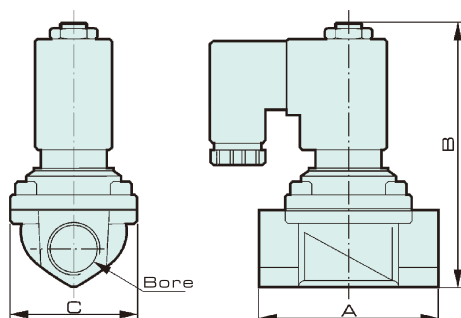

Dimension

Model	Bore	A	B	C
PU225-03S	PT3/8"	66.5	122.7	48.0
PU225-04S	PT1/2"	66.5	122.7	48.0
PU225-06S	PT3/4"	100.0	152.0	70.0
PU225-08S	PT1"	100.0	152.0	70.0